

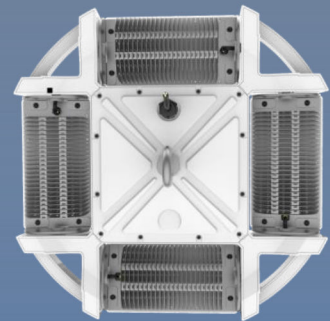


4BAY LED Highbay Light

100W | 150W | 200W | 240W

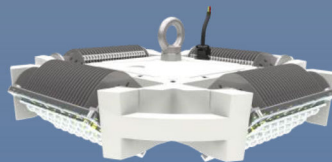

RoHS

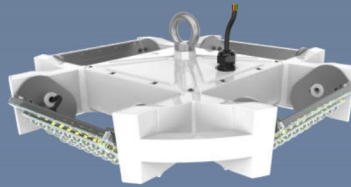

ACCREDITED BUSINESS

BBB Rating: A+



Illuminating
ENGINEERING SOCIETY

KEY FEATURES



Lumileds LED | Meanwell Driver | Aluminum Module | Stainless Screw
 140LM/W | CRI>80 | 2700-6500K | 90-277V | PF>0.95 | 30°/60°/120°
 IP65 | -40-60°Cavailable | 4KV Surge Protection | Anti-corrosion

| Model | CO-4Bay-100W | CO-4Bay-150W | CO-4Bay-200W | CO-4Bay-240W |
|---------------|--------------|--------------|--------------|--------------|
| Light Source | 192LEDS | 288LEDS | 384LEDS | 480LEDS |
| Luminous Flux | 14,000 | 21,000 | 28,000 | 33,600 |
| Weight | 4.3kg±5% | 4.3kg±5% | 5.1kg±5% | 5.1kg±5% |

Aluminum Cooling Rivet


Aluminum Cooling Fin

Heat Dissipation

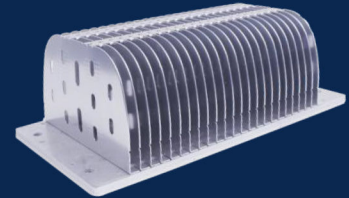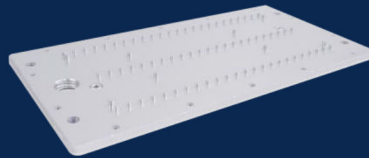

HIGH LUMINOUS FLUX

- 140lm/W luminaire efficiency
- Save 30% energy than regular LED

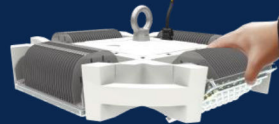

MODULE ADJUSTBALE

- Toolless light direction adjustment
- 16 tick-tock, 200° rotatable



INSTALLATION & MAINTENANCE FRIENDLY



- 3 step installation
- 35 Seconds replae a lens
- 160 Seconds replace a module




ULTRALIGHT

- Whole light 4.3 / 5.1Kg
- Lower freight cost
- Improve installation efficiency


30°/60°/120° Available (Lens Interchangeable)

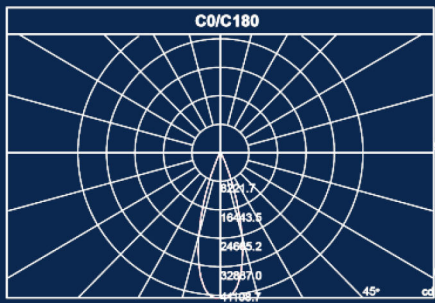

30°

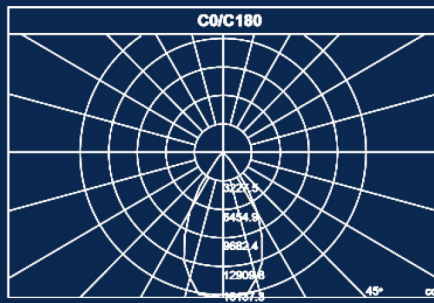

60°

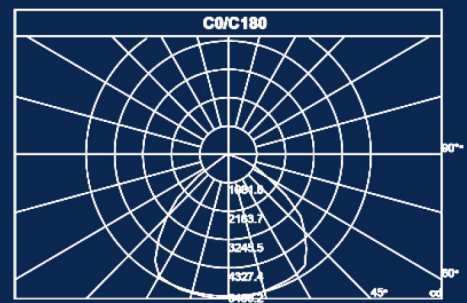

120°

2700k - 6500K Available



3000K

4000K

5000K

6000K

APPLICATIONS

Extensively applied in various indoor lighting project.

It can replace the traditional metal halide, high pressure sodium light and low efficacy LED light.



Indoor Playground



Workshop




Warehouse




Shed

*Send us the project information, we'll provide products recommendation, DIALux simulation & budget proposal.

INSTALLATION

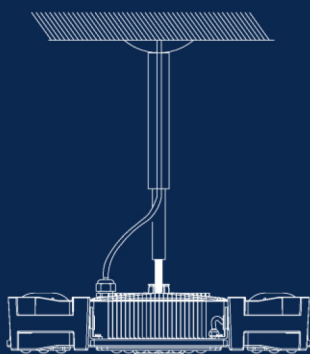


Optional accessories 1
Extension aluminum pole

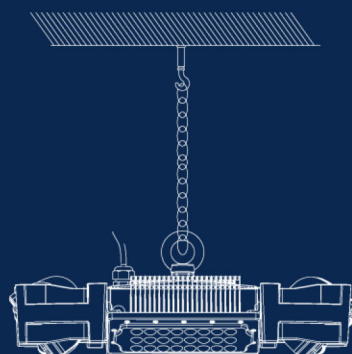

Optional accessories 2
Iron chain



DIMMENSIONS

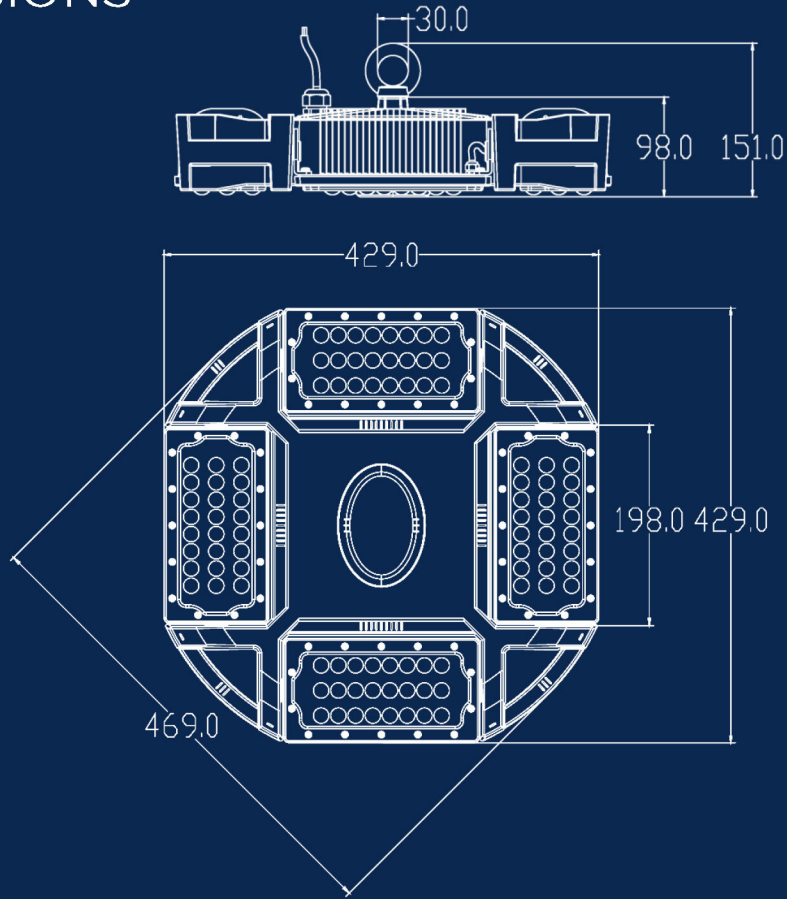

PACKAGE

| Model | Carton Size (mm) | Carton Weight (Kg) | PCS /Carton |
|--------------|------------------|--------------------|-------------|
| CO-4BAY-100W | 470*460*150 | 5.3 | 1 |
| CO-4BAY-150W | | 5.3 | 1 |
| CO-4BAY-200W | | 6.1 | 1 |
| CO-4BAY-240W | | 6.1 | 1 |

